


PTFE grey

DATASHEET

glass fabric
476 gram/m2
0.33 mm
1500 mm
warp 581 N/cm
weft 491 N/cm
91 N (45°)
PTFE
grey (other colors available on request)
incombustible according to UL94 V-0 rating
vertical fire-test
288°C continous
oil resistant
chemical resistant
water resistant
insulation covers
compensators
security clothing

Instalation

The instalacion of the PBS shield, wathever tissue is used is very easy. Put the PBS shield around the flange and close with the velcro. Than pull the strings and thithten strongly, close the stings with a knot. In this way the PBS shield is placed around the flange in a obtimal way.

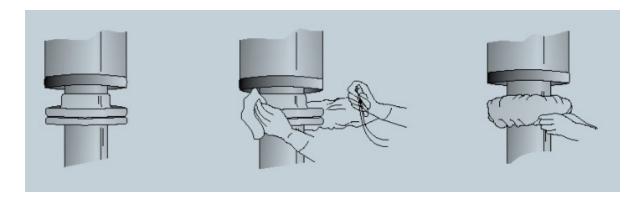

DB & Co bv• Vlamingenstraat 35 • 8530 Harelbeke • Belgium • Tel: +32 56 515551 • Mob: +32 475 440750 • info@dbco.be • www.dbco.be • www.insulshop.eu •